

MATERIAL


Profile: Material and finish same of Skyproof sheet
Rivets: Stainless steel AISI 304 A2

COMPONENTS

- nr. 1 profile L=2100mm
- nr. 12 stainless steel rivets

NOTES

- This accessory must positioned near the eave edge of the sheet, set back by approximately 20 mm.
- The profile must be fixed o the flat part of the sheet using rivets.
- Consider the expected thermal expansion of the sheet at the eaves, to avoid interference between the SKA125 profile and the SKA201 bracket at the sheet's minimum contraction.
- Profiles must overlap by 100 mm near the rib of the sheet.
- The profile must be installed following the project designed by a qualified technician.
- SkyProof Company shall not be held responsible in case of incorrect design or installation.

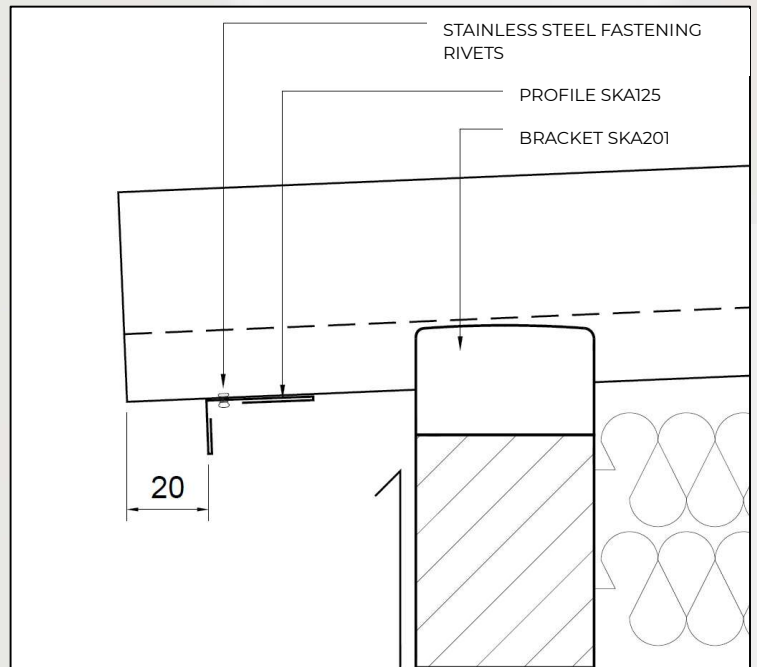

ASSEMBLY PROCEDURE

