
MATERIAL

Bracket: Polyamide PA6 GF30

Screws: Galvanized or stainless steel

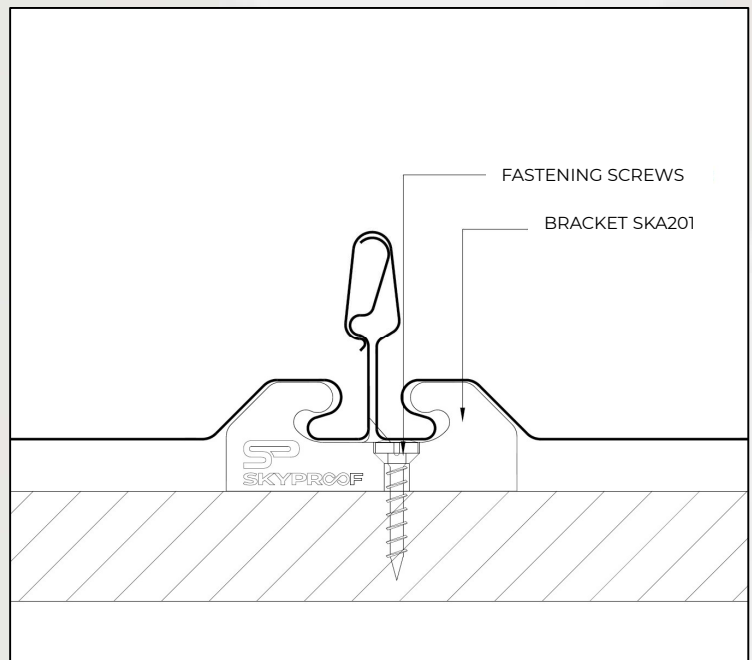
COMPONENTS

-nr. 1 polyamide bracket

-nr. 2 self-drilling screws (see SKA505 datasheet)

NOTES

- Mechanical performance has been evaluated using the standardized ASTM E1592-05 test.
- The test evaluated the performance of the bracket + sheet system. The limit reached was 7000 Pa and did not cause bracket failure in any case. The indicated value does not represent the limit of the clips.
- The standardized ASTM test is available for consultation. It was carried out with brackets spaced 1200 mm. The support for SKA201 brackets must be suitable for the safe installation of both screws (minimum width 50 mm), compatible with the selected fasteners and adequately resistant according to the project requirements.
- The brackets must be installed according to the design prepared by a qualified technician.
- SkyProof Company shall not be responsible in case of incorrect design or installation.


ASSEMBLY PROCEDURE
